

Visit wrist receiver

BE8102



Features

Discreet vibrations
Silent and non-intrusive

Clear signal identification
Uses LEDs and vibration patterns

Comfortable to wear
Materials that is kind to the skin

Easy to customize
Replaceable wrist band

Charger included
Equipped with a bed shaker jack

By your side, day and night.

The wrist receiver from Bellman & Symfon is part of the Visit smart home system that helps you to keep tabs on your home. It alerts you with gentle vibrations when the doorbell or telephone rings, when your baby needs you or if a fire should occur.

The receiver is equipped with a silicone wristband that is kind to the skin and can be worn like a regular wrist watch. It features

clear icons that light up in different colors to make it easy to identify the alert. Use it in and around the house to know whenever something happens that needs your attention.

The accompanying charger features battery backup and an outlet for a bed shaker. Just place it under your pillow or mattress to be alerted with vibrations if something happens during the night.



Technical specifications




Dimensions and weight

	Receiver	Charger
Height	49 mm, 1.9"	100 mm, 3.9"
Width	38 mm, 1.5"	95 mm, 3.7"
Depth	12 mm, 0.5"	117 mm, 4.6"
Weight	27 g, 0.9 oz.	185 g, 6.5 oz.



Buttons and controls

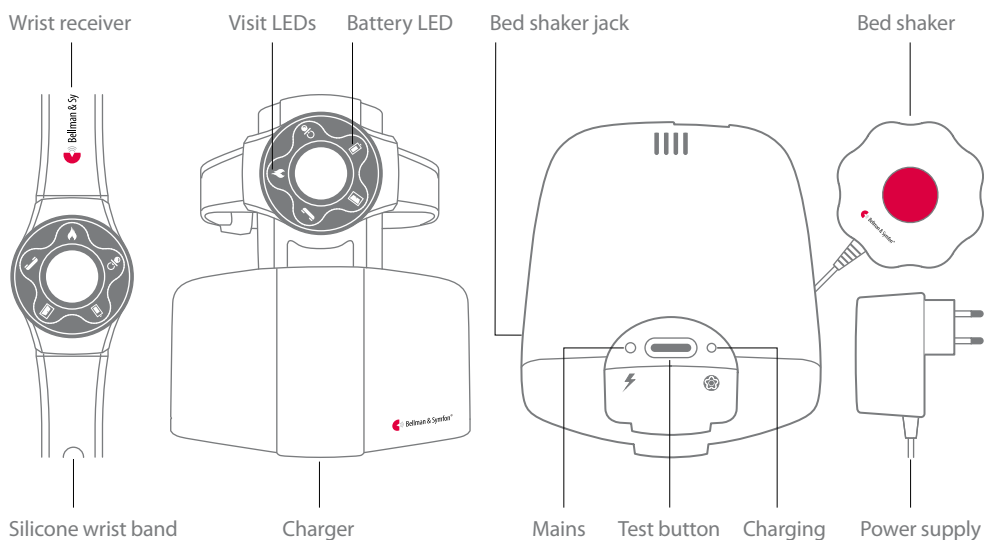

Features

- Discreet alerts
Produces silent and non-intrusive vibrations
- Clear signal identification
Uses colored LEDs and vibration patterns
- Comfortable to wear
Rubber wrist band that is kind to the skin
- Charger included
Equipped with a bed shaker jack

Frequency and coverage

- Radio frequency: 315 MHz, 433.92 MHz or 868.3 MHz, depending on the region
- Coverage: 50 – 250 m, depending on the radio frequency and building's characteristics

Environmental requirements

- Operating temperature: 15° to 35° C
59° to 95° F
- Relative humidity: 5% to 95%
(non condensing)

Power and battery

- Mains power
7.5 V DC/1500 mA with power supply unit
- Battery power
Receiver: 1 x 1.2 V V40H rechargeable battery
Charger: 4 x 1.2 V NiMH rechargeable batteries
- Power consumption
Receiver: Active: 100 mA, Idle position: 3 mA
Charger: Active 650 mA, Idle position 70 mA
- Operating and charging time
Receiver: ~30 h, Charging time: ~8 h
Charger: Backup battery charging time: ~24 h

In the box

- BE1560 Visit wrist receiver with extra wrist band
- BE1570 Charger with power supply

Regulatory requirements

- Complies with the following requirements:
CE, FCC, RoHS, RCM, WEEE, Der Grüne punkt



Visit indicators

The Visit LEDs normally indicates the following:

- Orange LED, pacifier symbol
The baby monitor is activated
- Green LED, door symbol
The door transmitter is activated
- Yellow LED, telephone symbol
The telephone transmitter is activated
- Red LED, fire symbol
The smoke alarm is activated

Accessories

- BE1270 Bed shaker
- BE9086 External trigger cable

© 2016 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE8102_001DAS002

bellman.com